



Blind spot sticker France
 Decree 2020-1396 of 17/11/2020
 Decree in preparation

Which vehicles:
 - PTAC > 3.5 tonnes
 - vehicles already in circulation
 - new vehicles



Tractor with semitrailer




Koppelschotel

Height placement to be taken into account for side and rear boards:

- A Maximum 1500 mm above the ground
- B At least 900 mm above the ground
- C Positioning of the side surfaces to be observed on the left and right measurements:
 - Motor vehicles: within 1000 mm of the total front

Box truck with trailer

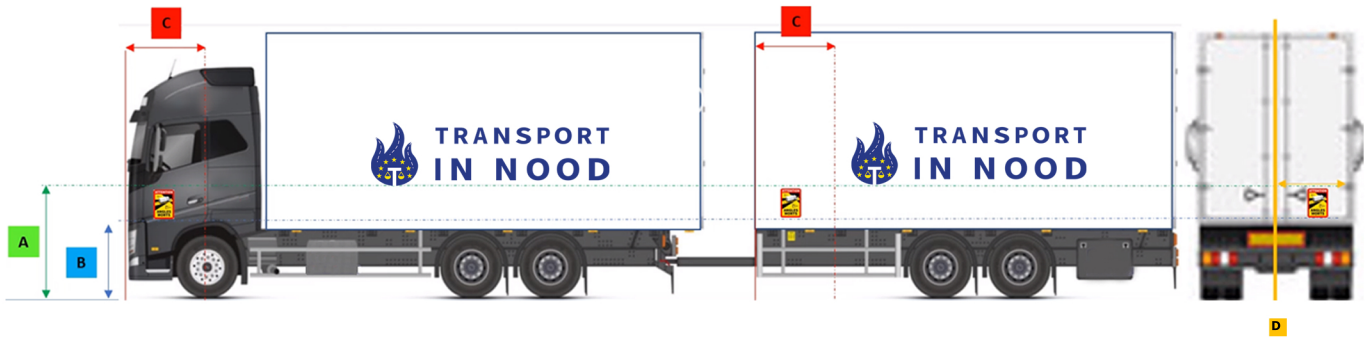

Offset pivot point

Height placement to be taken into account for side and rear boards:

- A Maximum 1500 mm above the ground
- B Minimum 900 mm above the ground
- C Positioning of the side surfaces to be observed on the left and right measurements:
 - Motor vehicles: within 1000 mm of the total front
 - Semi-trailers: within 1000 mm of the coupling pin
- D Positioning of the rear plane to be observed: to the right of the longitudinal median plane

Box truck



Height positioning to be observed for side and rear signaling:

- A Maximum 1500 mm above the ground
- B Minimum 900 mm above the ground
- C Positioning of the side surfaces to be observed

